


CA500

100HP



4-cylinder
horizontally-opposed

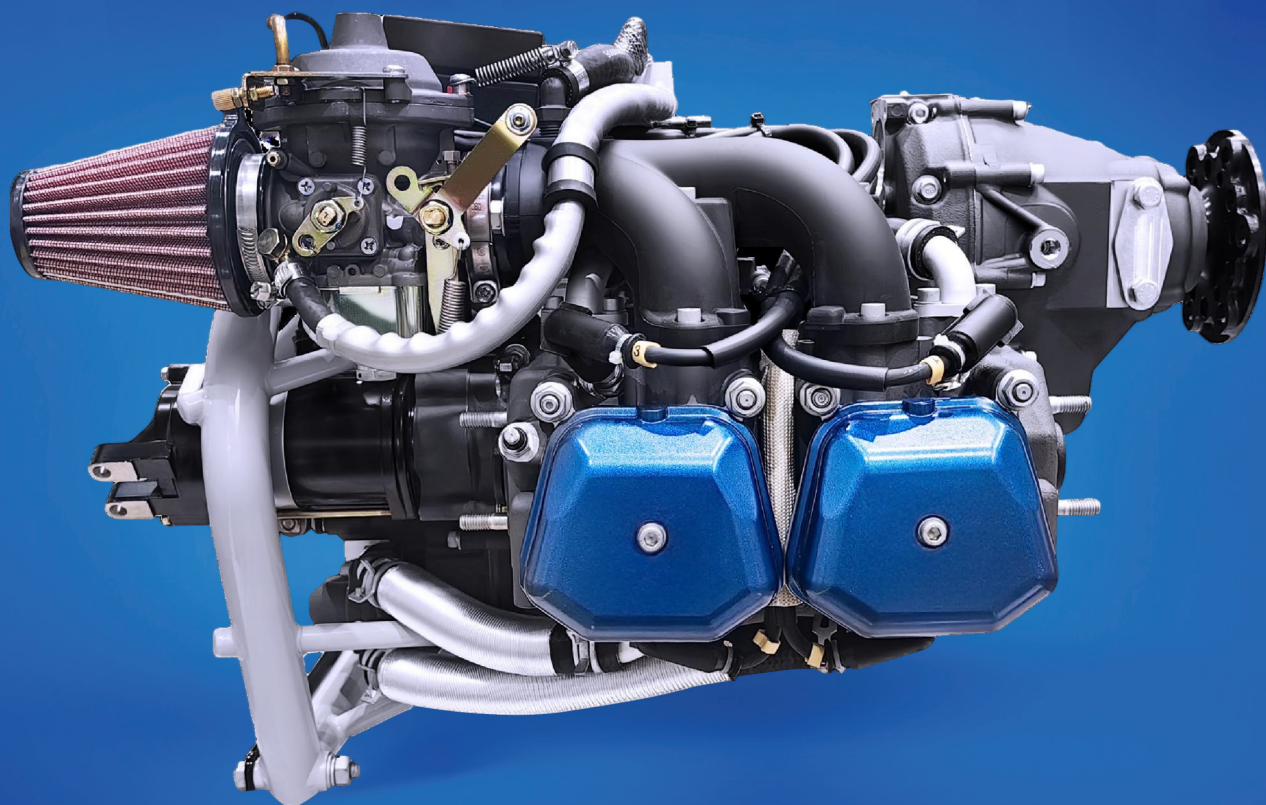

Liquid-/
air-cooled



Dual ignition
redundancy design



Gearbox
(i=2.43)



Max. operating
altitude 4000m (13,124 ft)



Dry sump forced lubrication
with separate oil tank



Custom Solutions for Civil Aviation

www.aerozs.com

Tel. +86 023-6637 6081

Email: aero@zsengine.com



ELECTRONIC BROCHURE



FACEBOOK

*FICHE D'IDENTIFICATION ULM | CAAC approved



CA500	
Displacement	1352 cm ³
Dimension	670×580×420 mm
Bore	84 mm
Stroke	61 mm
Dry weight	56.6 kg/124.5 lbs
Max. Power	73.5 kW@5800 r/min
Alternator	0.25kW@14V
Start Mode	Electric starter
Ignition	Digital dual ignition
Fuel Supply System	Carburetor
Fuel	min. RON 95
Cooling	Liquid cooled(cylinder head) and air cooled(cylinder)
TBO	2000 hrs

